


PACSystems™ RSTi-EP

ETHERCAT® NETWORK ADAPTER MODULE (EPXETC001)

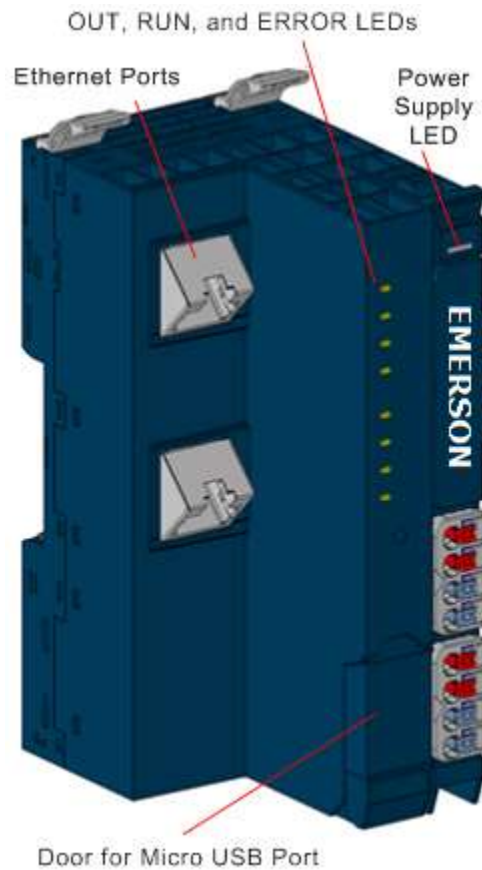

Warnings and Caution Notes as Used in this Publication

WARNING

Warning notices are used in this publication to emphasize that hazardous voltages, currents, temperatures, or other conditions that could cause personal injury exist in this equipment or may be associated with its use.

In situations where inattention could cause either personal injury or damage to equipment, a Warning notice is used.

CAUTION

Caution notices are used where equipment might be damaged if care is not taken.

Note: Notes merely call attention to information that is especially significant to understanding and operating the equipment.

These instructions do not purport to cover all details or variations in equipment, nor to provide for every possible contingency to be met during installation, operation, and maintenance. The information is supplied for informational purposes only, and Emerson makes no warranty as to the accuracy of the information included herein. Changes, modifications, and/or improvements to equipment and specifications are made periodically and these changes may or may not be reflected herein. It is understood that Emerson may make changes, modifications, or improvements to the equipment referenced herein or to the document itself at any time. This document is intended for trained personnel familiar with the Emerson products referenced herein.

Emerson may have patents or pending patent applications covering subject matter in this document. The furnishing of this document does not provide any license whatsoever to any of these patents.

Emerson provides the following document and the information included therein as-is and without warranty of any kind, expressed or implied, including but not limited to any implied statutory warranty of merchantability or fitness for particular purpose.

Product Description

The EPXETC001 network adapter is an EtherCAT¹ device certified by the EtherCAT Technology Group. The network adapter is the head module for the RSTi-EP system bus, to which up to 64 active RSTi-EP modules can be connected. The EtherCAT network adapter has two Ethernet ports and an integrated switch.

The network adapter can be accessed with a system-independent web server application via the USB service interface or the EtherCAT. Thus, all information, such as diagnostics, status values and parameters, can be read and all connected modules can be simulated or forced.

The station's main power supply is integrated in the network adapter. Power is supplied via two 4-pole connectors, separated into the input and output current paths.

Caution, the RSTi-EP station is usually installed on a horizontally positioned DIN rail. Installation on vertically positioned DIN rails is also possible. However, the heat dissipation is reduced such that the derating values change (refer to the section, Thermal Derating).

Modules should to be allowed to de-energize for a minimum 10 seconds after power down, prior to starting any maintenance activity. The network adapter cannot be hot-swapped.

Refer to the RSTi-EP Slice I/O User Manual (GFK-2958) for additional information.

Refer to the RSTi-EP Power Supply Reference Guide, a software utility available on PAC Machine Edition V9.00, for detailed power-feed requirements.

Module Features

- Supports up to 64 active RSTi-EP modules
- Spring-style technology for ease of wiring
- DIN rail mounted
- Double-click installation for positive indication of correct installation
- Built-in Web Server for diagnostic information and firmware update through Ethernet and micro USB port
- Support for daisy-chain/line topologies

Ordering Information

Module	Description
EPXETC001	RSTi-EP Slice I/O EtherCAT Network Adapter

Specifications

Specification	EPXETC001
System data	
Connection	2 x RJ-45
Fieldbus protocol	EtherCAT

¹ EtherCAT[®] is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany

Specification		EPXETC001	
Process image	Process data	max. 1024 bytes	
	Parameter data	max. 64*64 = 4 KB	
	Diagnostic data	max. 64*50 = 3200 bytes	
Number of modules	max. 64 active		
Configuration interface	Micro USB 2.0		
Transfer rate	Fieldbus	Max. 100 Mbps	
	RTSi-EP system bus	Max. 48 Mbps	
Supply			
Supply voltage for system and inputs	20.4V – 28.8V		
Supply voltage for outputs	20.4V – 28.8V		
Max. feed-in current for input modules	10 A		
Max. feed-in current for output modules	10 A		
Current consumption from system current path I _{sys}	130 mA		
Connection data			
Type of connection	Spring style		
Conductor cross-section	Single-wired, fine-wired	0.14 – 1.5 mm ² (AWG 26 – 16)	
General data			
Operating temperature	-20°C to +60°C (-4 °F to +140 °F)		
Storage temperature	-40°C to +85°C (-40 °F to +185 °F)		
Air humidity (operation/transport)	5% to 95%, noncondensing as per IEC 61131-2		
Width	52 mm (2.05 in)		
Depth	76 mm (2.99 in)		
Height	120 mm (4.72 in)		
Weight	227 g (8 oz)		
Configuration	ESI file is available on the Support website https://www.emerson.com/Industrial-Automation-Controls/support for download and import into Programmer Tool which supports EtherCAT. The ESI supporting a firmware release is part of the firmware upgrade kit available on the Support website.		

LED Status

LED	Indication	LED State/Description
PWR	Power LED	Green: Supply voltage connected
SF	System Fault	Red: Configuration error, or error in the network adapter, or error in a module, or there is a new diagnostic report Red flashing: Station in Force mode
BF	Bus fault	Red: No connection to the fieldbus

LED	Indication	LED State/Description
		Red flashing: Configuration error, no connection to the control unit, or error in the parameter set
MT	Maintenance Required	Yellow: Error on the system bus or fieldbus
L/A IN	Connection/Activity	Green: Connection established between port 1 of the network adapter and another field device Green flashing: Data being exchanged on port 1
LA OUT	Connection/Activity	Green: Connection established between port 2 of the network adapter and another field device Green flashing: Data being exchanged on port 2
RUN	Network adapter state	Off: INIT Green flashing: PRE-OPERATIONAL Green lights up briefly: SAFE-OPERATIONAL Green: OPERATIONAL
ERROR	Internal error	Red: Critical error in the network adapter Red lights up briefly: Error in network adapter application Red briefly lights up twice: Output Syncmanager Watchdog expired Red flashing: Configuration error

LED Indicators




LED	EPXETC001
Power Supply	Green: Supply voltage > 18 V DC Red: At least one current path < 18 V

3.1	Green: Input current path supply voltage > 18 V DC
3.2	Red: Input current path supply voltage < 18 V DC
3.3	
3.4	Red: Internal fuse defective
4.1	Green: Output current path supply voltage > 18 V DC
4.2	Red: Output current path supply voltage < 18 V DC
4.3	
4.4	Red: Internal fuse defective

Field wiring

The connection frame has one connector, and two 24 V DC wires can be connected to each connector, along with two ground connections. Those four connectors are used as shown in the following figure. The Spring style technology allows either finely stranded or solid wire with crimped wire-end ferrules or ultrasonically welded wires, each with a maximum cross-section of 1.5 mm² (16 guage), to be inserted easily through the opening in the clamping terminal without having to use tools. To insert fine stranded wires without wire-end ferrules, the pusher must be pressed in with a screwdriver and released to latch the wire.

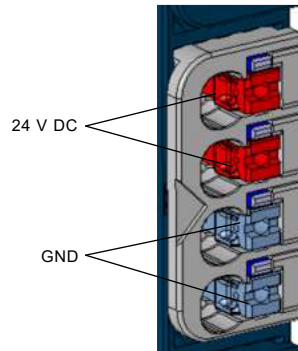

Connector Block

Connector Specifications:


- Conductor cross-section 0.14 to 1.5 mm² (26 – 16 guage)
- Maximum ampacity: 10 A
- 4-pole

The modules do not have a fused sensor/activator power supply. All cables to the connected sensors/actuators must be fused corresponding to their conductor cross-sections (as per Standard DIN EN 60204-1, section 12).

Refer to the *RSTi-EP Slice I/O User Manual* (GFK-2958) for additional information.


For technical assistance, go to <https://www.emerson.com/Industrial-Automation-Controls/support>.

Connection Diagrams

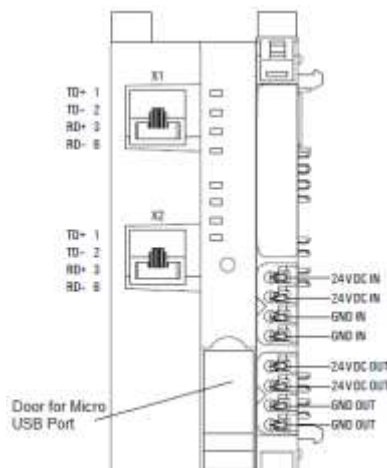

EPXETC001

Connection Block Diagrams

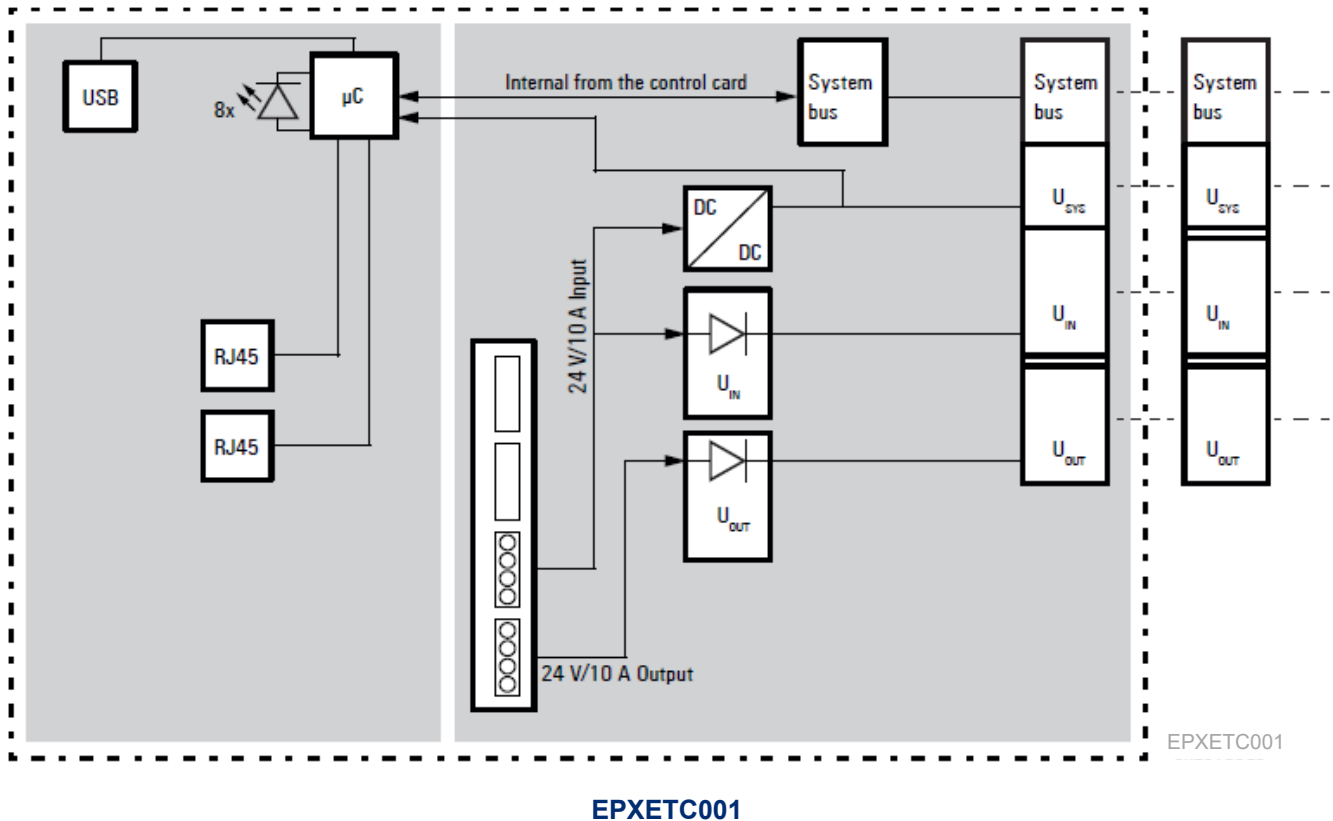

Installation in Hazardous Areas

⚠ WARNING

- EQUIPMENT LABELED WITH REFERENCE TO CLASS I, GROUPS A, B, C & D, DIV. 2 HAZARDOUS AREAS IS SUITABLE FOR USE IN CLASS I, DIVISION 2, GROUPS A, B, C, D OR NON-HAZARDOUS AREAS ONLY
- EXPLOSION HAZARD - SUBSTITUTION OF COMPONENTS MAY IMPAIR SUITABILITY FOR CLASS I, DIVISION 2;
- EXPLOSION HAZARD - WHEN IN HAZARDOUS AREAS, TURN OFF POWER BEFORE REPLACING OR WIRING MODULES; AND
- EXPLOSION HAZARD - DO NOT CONNECT OR DISCONNECT EQUIPMENT UNLESS POWER HAS BEEN SWITCHED OFF OR THE AREA IS KNOWN TO BE NONHAZARDOUS.

ATEX Marking

Ⓔ II 3 G Ex nA IIC T4 Gc

Ta: -20°C to +60°C (-4° F to +140 °F)

Thermal Derating

The power supply is restricted according to the temperature. The following values apply for the horizontal and vertical positioning of the RSTi-EP station:

Temperature-dependent Values for the Power Supply

Power Supply	Horizontal	Vertical
Network adapter power supply	60°C (140 °F) : 2 x 8 A 55°C (131 °F) : 2 x 10 A	55°C (131 °F) : 2 x 6 A 50°C (122 °F) : 2 x 8 A
Power-feed module power supply	60°C (140 °F) : 1 x 10 A	55°C (131 °F) : 1 x 8 A

Refer to the *RSTi-EP Slice I/O Module User Manual (GFK-2958)* for additional information.

Supported Modules and Power Supplies

The following modules can be used with this release of the RSTi-EP Profibus Network Adaptor :

Catalog Number	Module Description
Digital Input Modules	
EP-1214	Digital Input, 4 Points, Positive Logic 24VDC, 2,3, or 4 Wire
EP-1218	Digital Input, 8 Points, Positive Logic, 24VDC 2 Wire
EP-1318	Digital Input, 8 Points, Positive Logic, 24VDC 3 Wire
EP-125F	Digital Input, 16 Points, Positive Logic, 24VDC, 1 Wire
EP-153F	Digital Input, 16 Points, Negative Logic, 24VDC, 1 Wire
EP-12F4	Digital Input, 4 Points, Positive Logic 24VDC, 2,3, or 4 Wire, Time stamp
EP-1804	Digital Input, 4 Points 110/230 VAC (65 – 277 VAC), 2 Wire, Isolated
Digital Output Modules	
EP-2214	Digital Output, 4 Points, Positive Logic 24VDC, 0.5A, 2,3, or 4 Wire
EP-2614	Digital Output, 4 Points, Positive Logic 24VDC, 2.0A, 2,3, or 4 Wire
EP-2634	Digital Output, 4 Points, Positive/Negative Logic 24VDC, 2.0A, 2,3, or 4 Wire
EP-2218	Digital Output, 8 Points, Positive Logic, 24VDC, 0.5A, 2 Wire
EP-225F	Digital Output, 16 Points, Positive Logic, 24VDC, 0.5A, 1 Wire
EP-291F	Digital Output, 16 Points, Negative Logic, 24VDC, 0.5A, 1 Wire

Catalog Number	Module Description
Digital Relay Output Modules	
EP-2714	Digital Relay Output, 4 Points, Positive Logic, 24 - 220 VDC/VAC, 6A, 2 Wire
EP-2814	Solid-state Relay Output Module
Analog Input Modules	
EP-3164	Analog Input, 4 Channels Voltage/Current 16 Bits 2, 3, or 4 Wire
EP-3264	Analog Input, 4 Channels Voltage/Current 16 Bits with Diagnostics 2, 3, or 4 Wire
EP-3124	Analog Input, 4 Channels Voltage/Current 12 Bits 2, 3, or 4 Wire
EP-3368	Analog Input, 8 Channels Current 16 Bits 2, 3, or 4 Wire
EP-3468	Analog Input, 8 Channels Current 16 Bits 2, 3, or 4 Wire, Channel Diagnostic
EP-3664	Analog Input, 4 Channels Voltage/Current 16 Bits with Diagnostics 2, 3, or 4 Wire, Differential Input
EP-3704	Analog Input, 4 Channels RTD 16 Bits with Diagnostics 2, 3, or 4 Wire
EP-3804	Analog Input, 4 Channels TC 16 Bits with Diagnostics 2, 3, or 4 Wire
EP-1813	Power Measurement Module, 8 Channels
Analog Output Modules	
EP-4164	Analog Output, 4 Channels Voltage/Current 16 Bits 2, 3, or 4 Wire
EP-4264	Analog Output, 4 Channels Voltage/Current 16 Bits with Diagnostics 2, 3, or 4 Wire
Speciality Modules	
EP-5111	1 Channel High Speed Counter, AB 100 kHz 1 DO 24VDC, 0.5A
EP-5112	2 Channel High Speed Counter, AB 100 kHz
EP-5212	2 Channel Frequency Measurement, 100 kHz
EP-5261	1 Channel Serial Communications, 232, 422, 485
EP-5311	1 Channel SSI Encoder, BCD or Gray-Code Format, 5/24 VDC
EP-5422	2 Channels PWM Output, Positive Logic, 24VDC, 2.0 A
EP-5442	2 Channels PWM Output, Positive Logic, 24VDC, 0.5 A
EP-5324	IO-Link Communication Module, 4 Channels

Catalog Number	Module Description
Power Feed Modules for Input Current Path	
EP-7631	Power Module, 1 Channel 24VDC Input Flow 10A
Power Feed Modules for Output Current Path	
EP-7641	Power Module, 1 Channel 24VDC Output Flow 10A
Safe Feed-input Modules	
EP-1901	1 Safe Feed-Input, 24 VDC
EP-1902	2 Safe Feed-Inputs, 24 VDC, Programmable Delay
EP-1922	2 Safe Feed-Inputs, 24 VDC
Potential Distribution Modules	
EP-711F	Power Module, 16 Channels 24VDC Potential Distribution +24 VDC from Input Current Path
EP-751F	Power Module, 16 Channels 24VDC Potential Distribution +24 VDC from Output Current Path
EP-700F	Power Module, 16 Channels 24VDC Potential Distribution Functional Earth
EP-710F	Power Module, 16 Channels 24VDC Potential Distribution +0VDC from Input Current Path
EP-750F	Power Module, 16 Channels 24VDC Potential Distribution +0VDC from Output Current Path
Hot swap Modules	
EP-7990	Bump-less Output Hot swap Module

Release History

Catalog Number	Hardware Version	Firmware Version	Date	Comments
EPXETC001-ADAF	02.00.00	03.00.03	Feb 24	Firmware release 03.00.03 Support for EP-7990 is added to enable bump-less hot swap operation
EPXETC001-ACAE	02.00.00	02.03.00	Dec 19	Support for two newly introduced IO modules EP-1813 (Power Measurement module) and EP-5324 (IO-Link Communication Module) with only IPI update.

Catalog Number	Hardware Version	Firmware Version	Date	Comments
EPXETC001-ACAE	02.00.00	02.03.00	Sep 19	<p>Following Emerson's acquisition of this product, changes have been made to apply appropriate branding and registration of the product with required certification agencies. No changes to material, process, form, fit or functionality.</p> <p>Support for new Negative logic modules(EP-153F-Digital Input Module, 16 channel, 1 wire & EP-291F-Digital Output Module, 16 channel, 1 wire.</p> <p>Updates to webserver</p> <p>'Ordering data' data' is removed from General information section of Emerson branded products.</p> <p>Brand labeling Web Application to EMERSON.</p>
EPXETC001-ABAD	02.00.00	02.02.00	Mar 18	<p>The product revision is updated to be usable in marine / shipbuilding application and pass marine certification tests. [DNV-GL & Lloyd's Register]</p> <p>Enhancements and updates to Web Application :</p> <p>Reset button appears automatically when changes in parameter settings require a restart to take effect</p>
EPXETC001-AAAC	01.00.00	02.01.00	Nov 17	<p>Added display of slot numbers to list of compatible modules after selecting a firmware file in multi-update view.</p> <p>Added password policy and weak password check - default username and password will remain the same.</p> <p>Added HTTPS support and new parameter 'HTTPS settings' [Available with Hardware version "AB" & above only in combination with firmware version "AD" & above]</p> <p>New languages for Web Server available [Korean, French, Spanish, Portuguese and Italian]</p> <p>Support for EP-3664</p> <p>Issue Fixes :</p> <p>Fixed issue that live module unplug/replug sometimes corrupts I/O mapping</p> <p>Fixed issue that re-installation attempt of language files sometimes causes an error message</p> <p>Enhancements and updates to Web Application</p> <p>Fixed issue of outputs sometimes getting freezed when the IN port goes down while operated on a redundancy ring</p> <p>Web Application –</p> <p>Tooltips for coupler LEDs</p> <p>Improved arrangement of module parameters & general information</p> <p>Display of raw process data next to physical value</p> <p>Web application performance improved</p>

Catalog Number	Hardware Version	Firmware Version	Date	Comments
				<p>Enlarged supported data size of CoE 0x8nn0/0x9nn0:0x02 "Type string"</p> <p>Wording of EP-5212 in web server and ESI file now matches with manual</p> <p>Static node address can be set via engineering software</p> <p>Module Black list detection – Network Adaptor rejects incompatible modules</p> <p>Fixed issue with outputs sometimes freeze when the IN port goes down while operating in a redundancy ring system</p>
EPXETC001-AAAB	01.00.00	01.00.06	Sep 16	<p>Support for three new modules, EP-1804, EP-5261, and EP-5311</p> <p>Resolves a problem, see section Problems Resolved by this Release for more information</p>
EPXETC001-AAAA	01.00.00	01.00.00	Dec 15	Documentation update only, added known issues
EPXETC001-AAAA	01.00.00	01.00.00	Nov 15	Initial Release

Important Product Information for this Release

Updates

Product may be upgraded in the field using the Web firmware upgrade kit, which can be downloaded from <https://www.emerson.com/iac-support>

Modules	Firmware Version	Upgrade Kit
EPXETC001-ADAF	03.00.03	<p>EPXETC001-0007675-03_00_03-1.zip which includes the following files:</p> <ul style="list-style-type: none"> a. EPXETC001-0007675-03_00_03-1.bsc b. ESI_TwinCAT_EPXETC001_ADAF.zip <p>FW_upgrade_procedure</p>

Functional Compatibility

HW Index [Ver]	FW Index [Ver]					
	AA [01.00.00]	AB [01.00.06]	AC [02.01.00]	AD [02.02.00]	AE [02.03.00]	AF [03.00.03]
AA [01.00.00]	OK	OK	OK	OK	OK	OK
AB [02.00.00]	NO	NO	NO	OK	OK	OK
AC [02.00.00]	NO	NO	NO	OK	OK	OK
AD [02.00.00]	NO	NO	NO	OK	OK	OK
1. For HW version AAAD [01.00.00], use EPXETC001-0007669-02_02_00-2.bsc file. This file is not compatible with HW version ABXX [02.00.00]. 2. For HW version ABAD [02.00.00], use EPXETC001-0007675-02_02_00-3.bsc file. This file is not compatible with HW version AAXX [01.00.00]. 3. For HW version AAAE [01.00.00], use EPXETC001-0007669-02_03_00-1.bsc file. This file is not compatible with HW version ACXX [02.00.00]. For HW version ACAE [02.00.00], use EPXETC001-0007675-02_03_00-2.bsc file. This file is not compatible with HW version AAXX [01.00.00].						

Problems Resolved by this Release

Subject	Description
Channel diagnostics faults are reported during hot-swap of the modules.	During hot-swap of an I/O module the network adapter may report additional channel diagnostics messages in addition to the expected <i>Loss of Module</i> or <i>Addition of Module</i> fault.
Output behavior during hotswap	During hot insertion or removal of IO modules, a transient Loss of Power up-to 500ms may occur on the network adapter and IO modules, during which all of the outputs may drop to zero. This system behavior should be verified against the application requirements before hot insertion or removal of the IO module is done.

New Features and Enhancements

Subject	Description
N/A	N/A

Known Restrictions and Open Issues

Subject	Description
N/A	N/A

Operational Notes

Subject	Description
N/A	N/A

Product Documentation

RSTi-EP Slice I/O Module User Manual (GFK-2958)

RSTi-EP Slice I/O Functional Safety Module User Manual (GFK-2956)

General Contact Information

Home link: <http://www.emerson.com/industrial-automation-controls>

Knowledge Base: <https://www.emerson.com/iac-support>

Technical Support

Americas

Phone: 1-888-565-4155
1-434-214-8532 (If toll free option is unavailable)

Customer Care (Quotes/Orders/Returns): customercare.mas@emerson.com
Technical Support: support.mas@emerson.com

Europe

Phone: +800-4444-8001
+420-225-379-328 (If toll free option is unavailable)

+39-0362-228-5555 (from Italy - if toll-free 800 option is unavailable or dialing from a mobile telephone)

Customer Care (Quotes/Orders/Returns): customercare.emea.mas@emerson.com
Technical Support: support.mas.emea@emerson.com

Asia

Phone: +86-400-842-8599
+65-3157-9591 (All other Countries)

Customer Care (Quotes/Orders/Returns): customercare.cn.mas@emerson.com
Technical Support: support.mas.apac@emerson.com

Any escalation request should be sent to mas.sfdcescalation@emerson.com

Note: If the product is purchased through an Authorized Channel Partner, please contact the seller directly for any support.

Emerson reserves the right to modify or improve the designs or specifications of the products mentioned in this manual at any time without notice. Emerson does not assume responsibility for the selection, use, or maintenance of any product. Responsibility for proper selection, use, and maintenance of any Emerson product remains solely with the purchaser.

© 2024 Emerson. All rights reserved. Emerson Terms and Conditions of Sale are available upon request. The Emerson logo is a trademark and service mark of Emerson Electric Co. All other marks are the property of their respective owners.

